









# LITTLE MOUNTAINS



FINISHED SIZE | 53" x 59"

## FABRIC REQUIREMENTS

Fabric <b>A</b>	CAP-PA-1411	¼ yd.
Fabric <b>B</b>	CAP-PA-1405	¼ yd.
Fabric <b>C</b>	CAP-PA-1400	¼ yd.
Fabric <b>D</b>	CAP-PA-1407	¼ yd.
Fabric <b>E</b>	CAP-PA-1410	⅜ yd.
Fabric <b>F</b>	CAP-PA-1403	¼ yd.
Fabric <b>G</b>	CAP-PA-1401	FQ.
Fabric <b>H</b>	PE-450	¼ yd.
Fabric <b>I</b>	PE-488	¼ yd.
Fabric <b>J</b>	PE-487	¼ yd.
Fabric <b>K</b>	PE-485	FQ.
Fabric <b>L</b>	PE-421	¼ yd.
Fabric <b>M</b>	PE-447	½ yd.
Fabric <b>N</b>	PE-445	⅜ yd.
Fabric <b>O</b>	PE-433	2 yd.

### BACKING FABRIC

CAP-PA-1404 3½ yds (*Suggested*)

### BINDING FABRIC

Fabric **N** PE-445 (*Included*)

## CUTTING DIRECTIONS

¼" seam allowances are included.  
WOF means width of fabric.

### Fabric **A**:

- Two (2) 4½" x WOF strips.

Sub cut

- Twenty (20) template 1.

### Fabric **B**:

- One (1) 4½" x WOF strip.

Sub cut:

- Fourteen (14) template 1.

### Fabric **C** :

- Two (2) 4½" x WOF strips.

Sub cut:

- Twelve (12) template 1. (See Diagram 2)

### Fabric **D** :

- Two (2) 4½" x WOF strips.

Sub cut:

- Twenty one (21) template 1.

### Fabric **E**:

- Three (3) 4½" x WOF strips.

Sub cut:

- Thirty eight (38) template 1.

### Fabric **F**:

- One (1) 4½" x WOF strip.

Sub cut:

- Nine (9) template 1.

### Fabric **G**:

- One (1) template 3.

### Fabric **H**:

- One (1) 5½" x WOF strip.

Sub cut

- One (1) 19½" x 5½" strip.
- Three (3) template 1.

### Fabric **I**:

- One (1) 4½" x WOF strip.

Sub Cut

- Thirteen (13) template 1.

### Fabric **J**:

- One (1) 5½" x WOF strip.

Sub cut

- One (1) template 1.
- One (1) 19½" x 5½" strip.





- Take a ruler, place it in a 60 degree position and trim the left bottom corner of (2) 27½" x 4" strip from fabric O, (1) 18½" x 4" strip from fabric O, and (1) 12½" x 4" strip from fabric O.

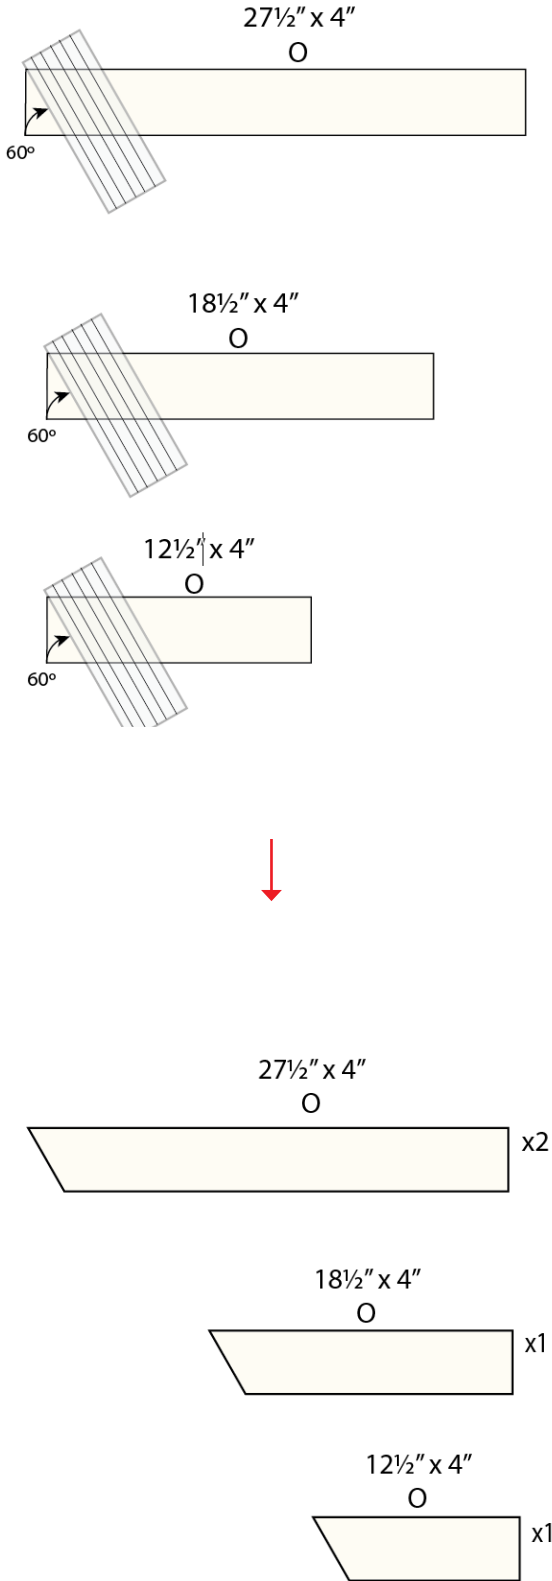


DIAGRAM 4

- Join (1) WOF x 4" strip from fabric O with (1) 17½" x 4" strip from fabric O. (Repeat the same step 5 more times).

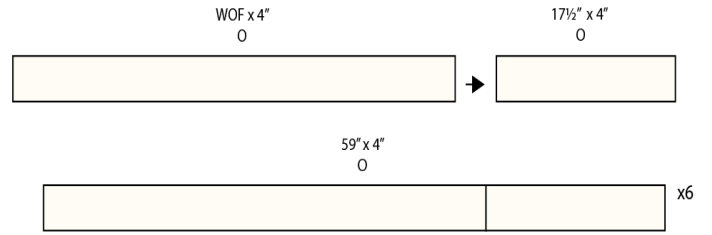


DIAGRAM 5

- Sew all 59" x 4" strips from fabric O together, set aside.

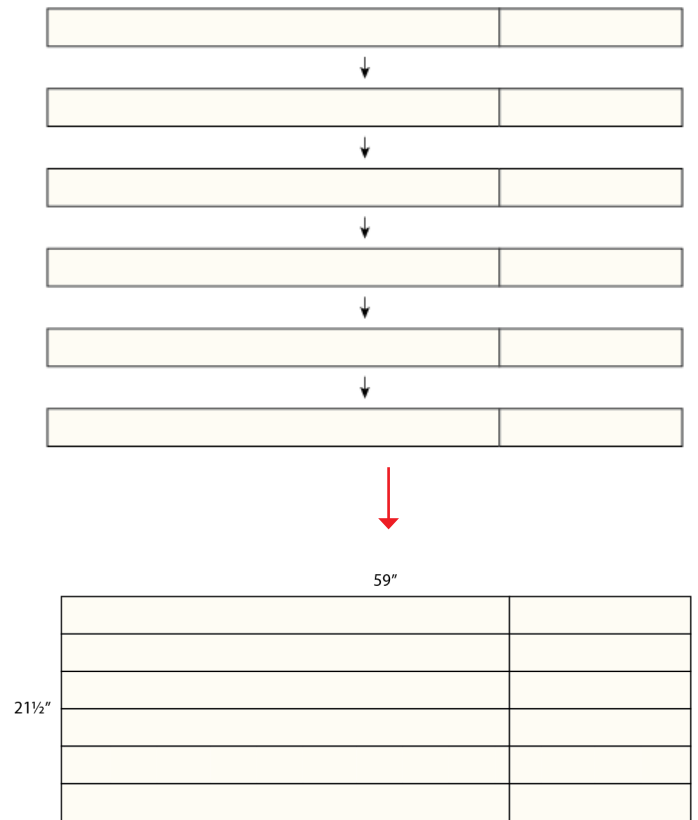


DIAGRAM 5

- Arrange strips and triangles per rows.
- For fabric placement and attachment see diagram below:

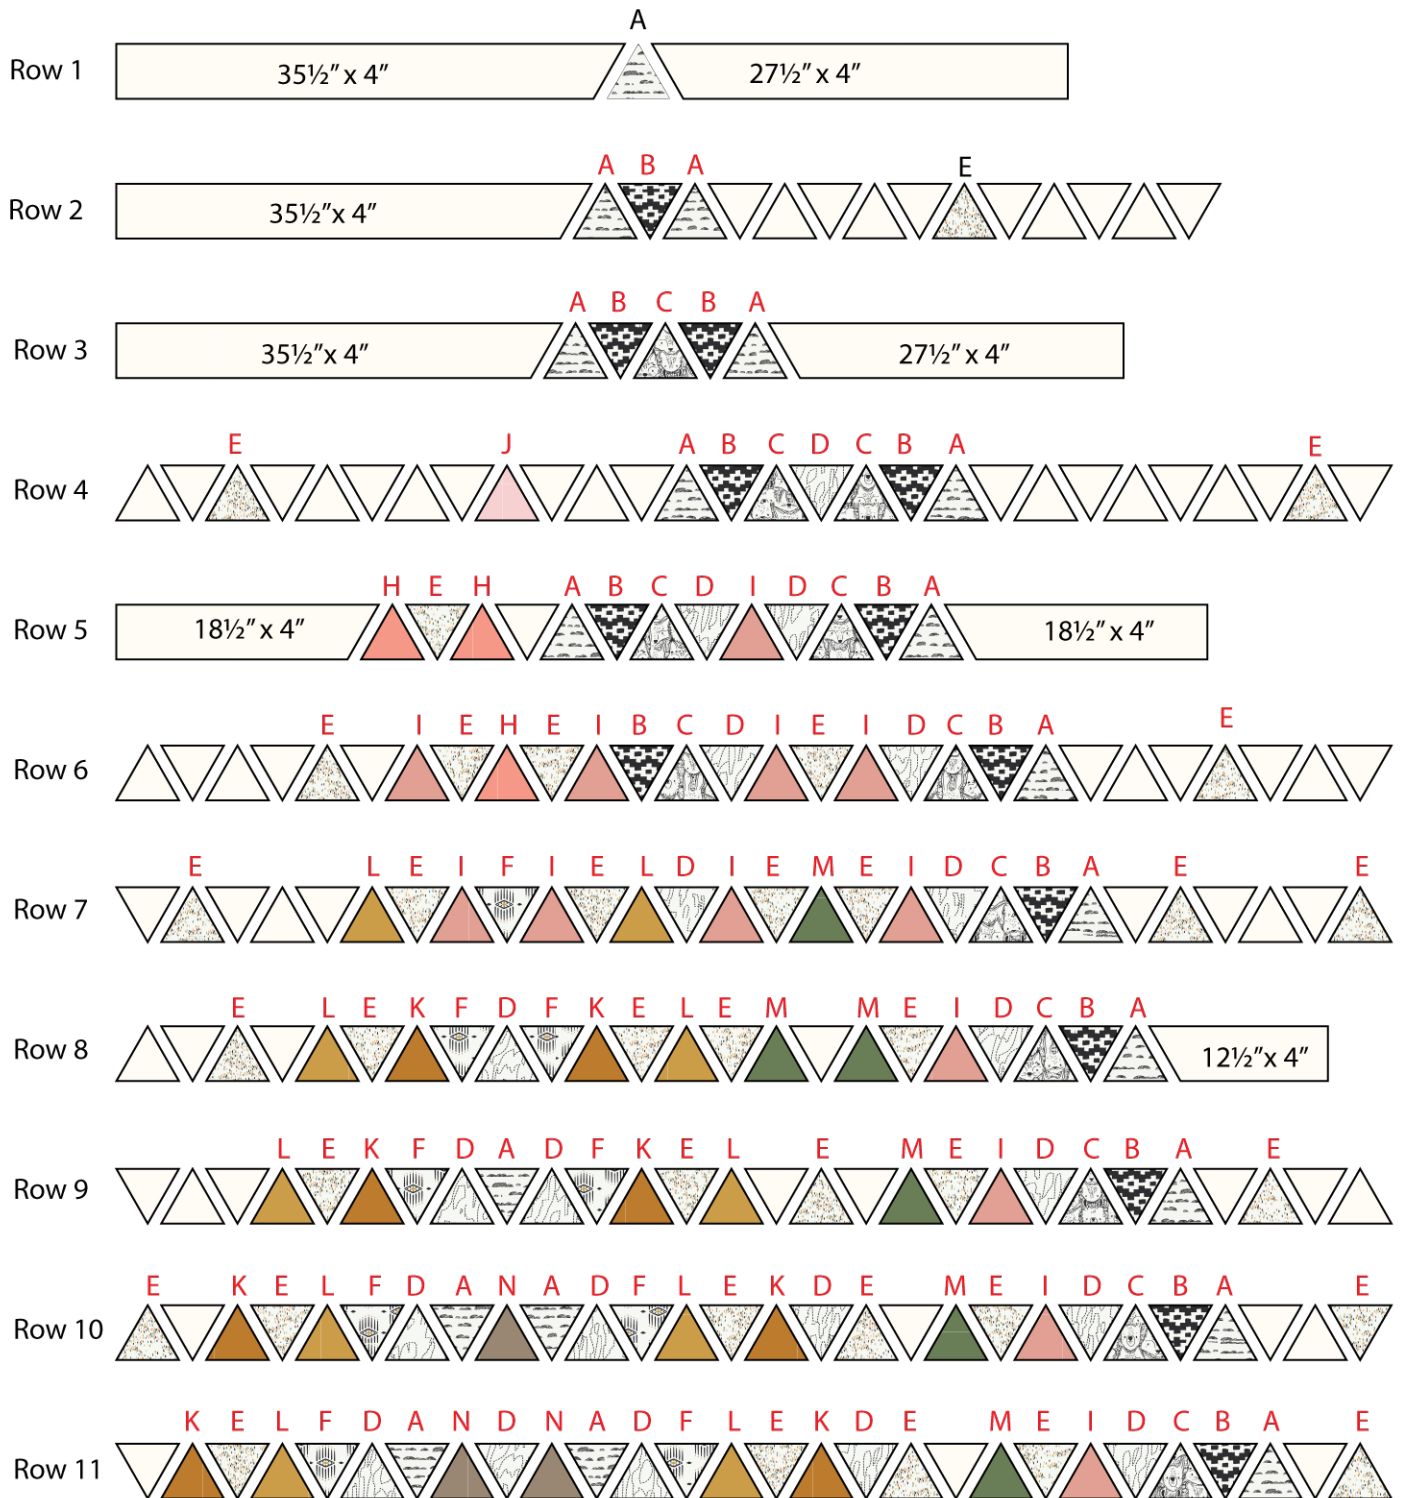


DIAGRAM 6





- Join the 21½" x 59" strip block from fabric **G** to the top.

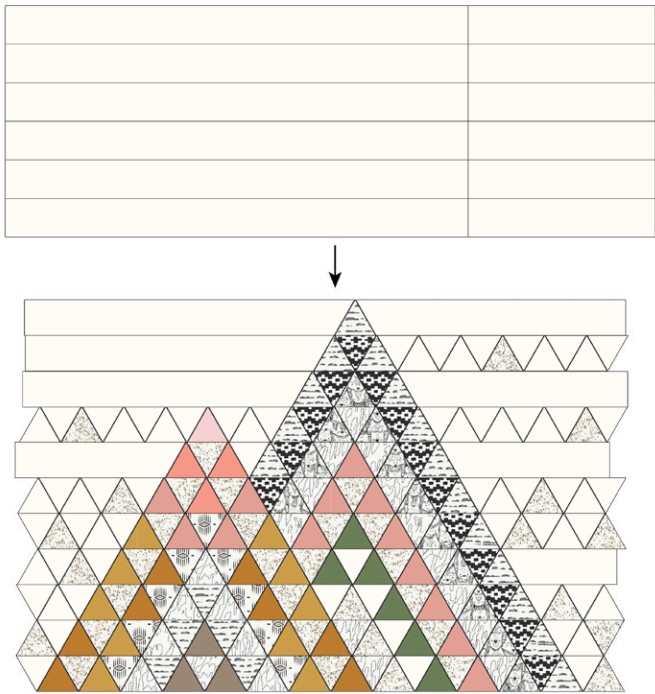


DIAGRAM 8

- Trim to a 53" x 59".

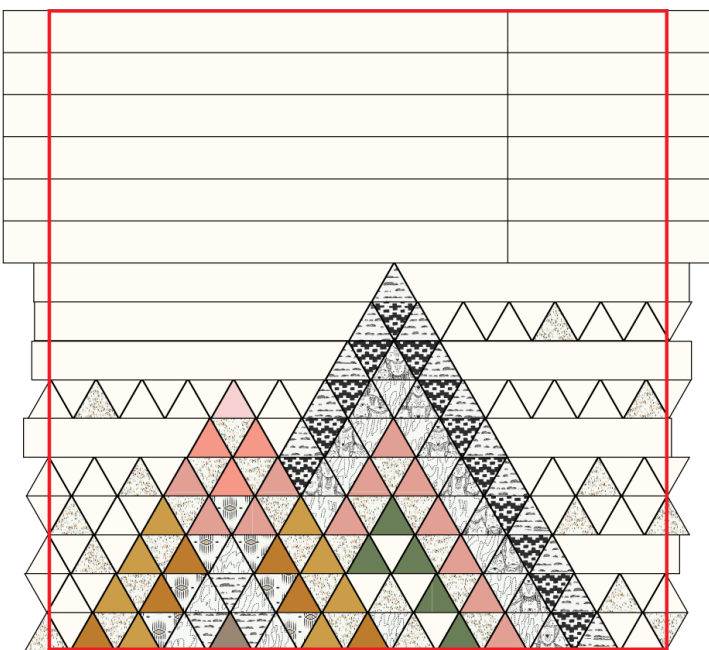


DIAGRAM 9

- Place template 4 from fabric **K** on top of template 3 from fabric **G**.
- Sew it on the top left corner of the quilt top. See diagram 12 for placement.

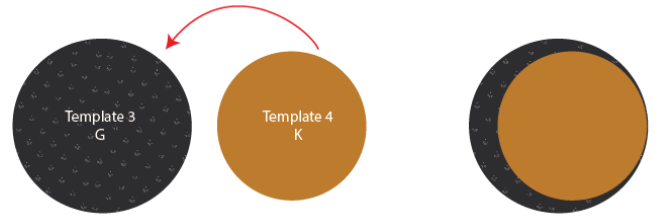


DIAGRAM 10

- Join (1) 19½" x 5½" strip from fabric **H** with a (1) 19½" x 5½" strip from fabric **J**.
- Place template 7 on top and cut all around the template.

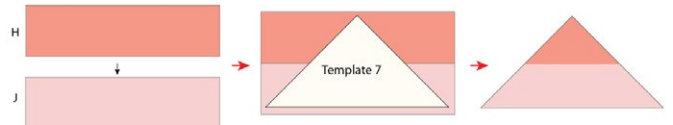


DIAGRAM 11

- Place templates 5 and 6 following the diagram below.
- Use a zig zag stitch or preferred stitch method to sew around each figure to attach templates on the quilt top.
- Quilt as desired.



DIAGRAM 12

## QUILT ASSEMBLY

*Sew rights sides together.*


- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.

## BINDING

*Sew rights sides together.*

- Cut enough strips  $1\frac{1}{2}$ " wide by the width of the fabric **N** to make a final strip 238" long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with  $\frac{1}{4}$ " seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching  $\frac{1}{4}$ " before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of  $45^\circ$  and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at  $\frac{1}{4}$ " of the border, stitching all the layers. Do the same in the four corners of the quilt.


- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to  $\frac{1}{4}$ " and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.

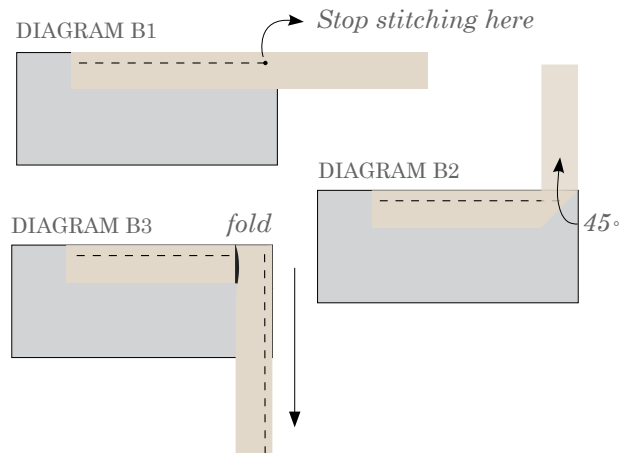







TEMPLATES

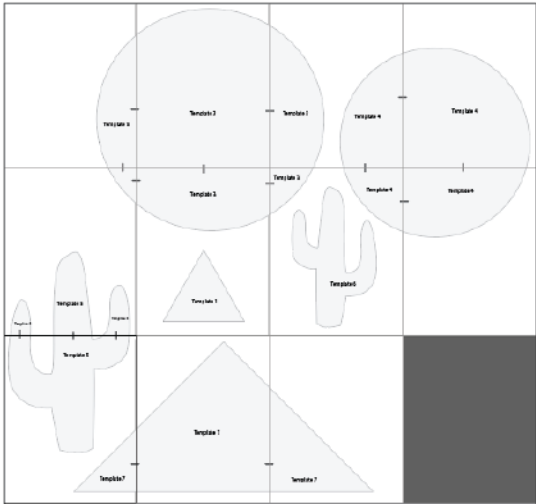


1" Test Square

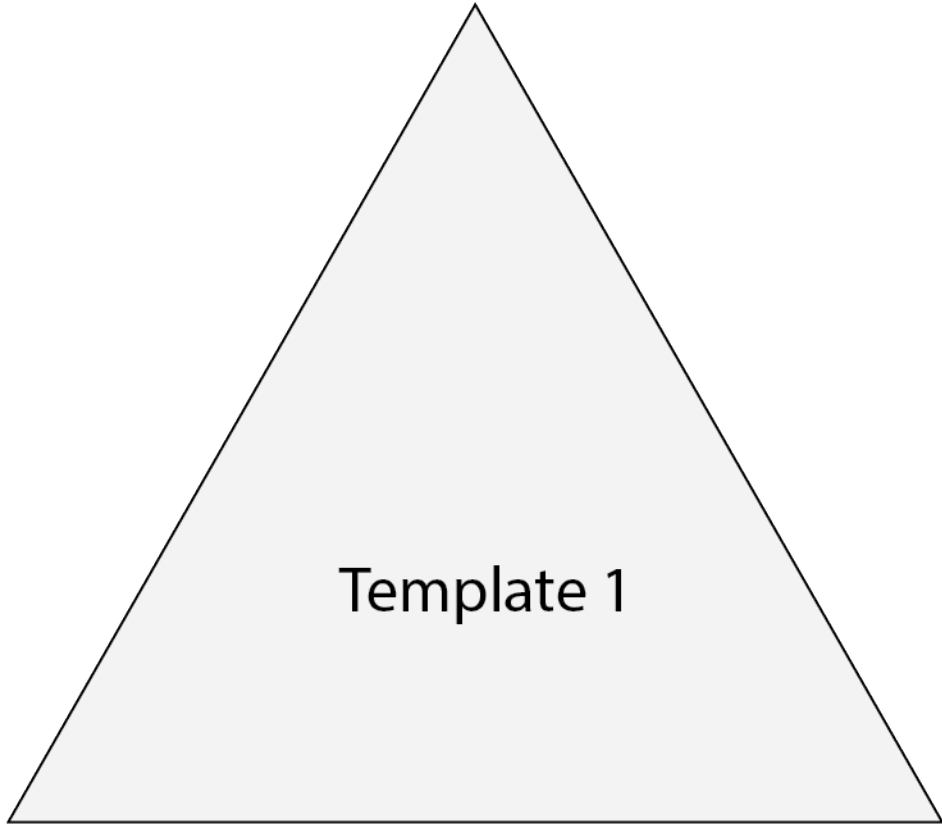

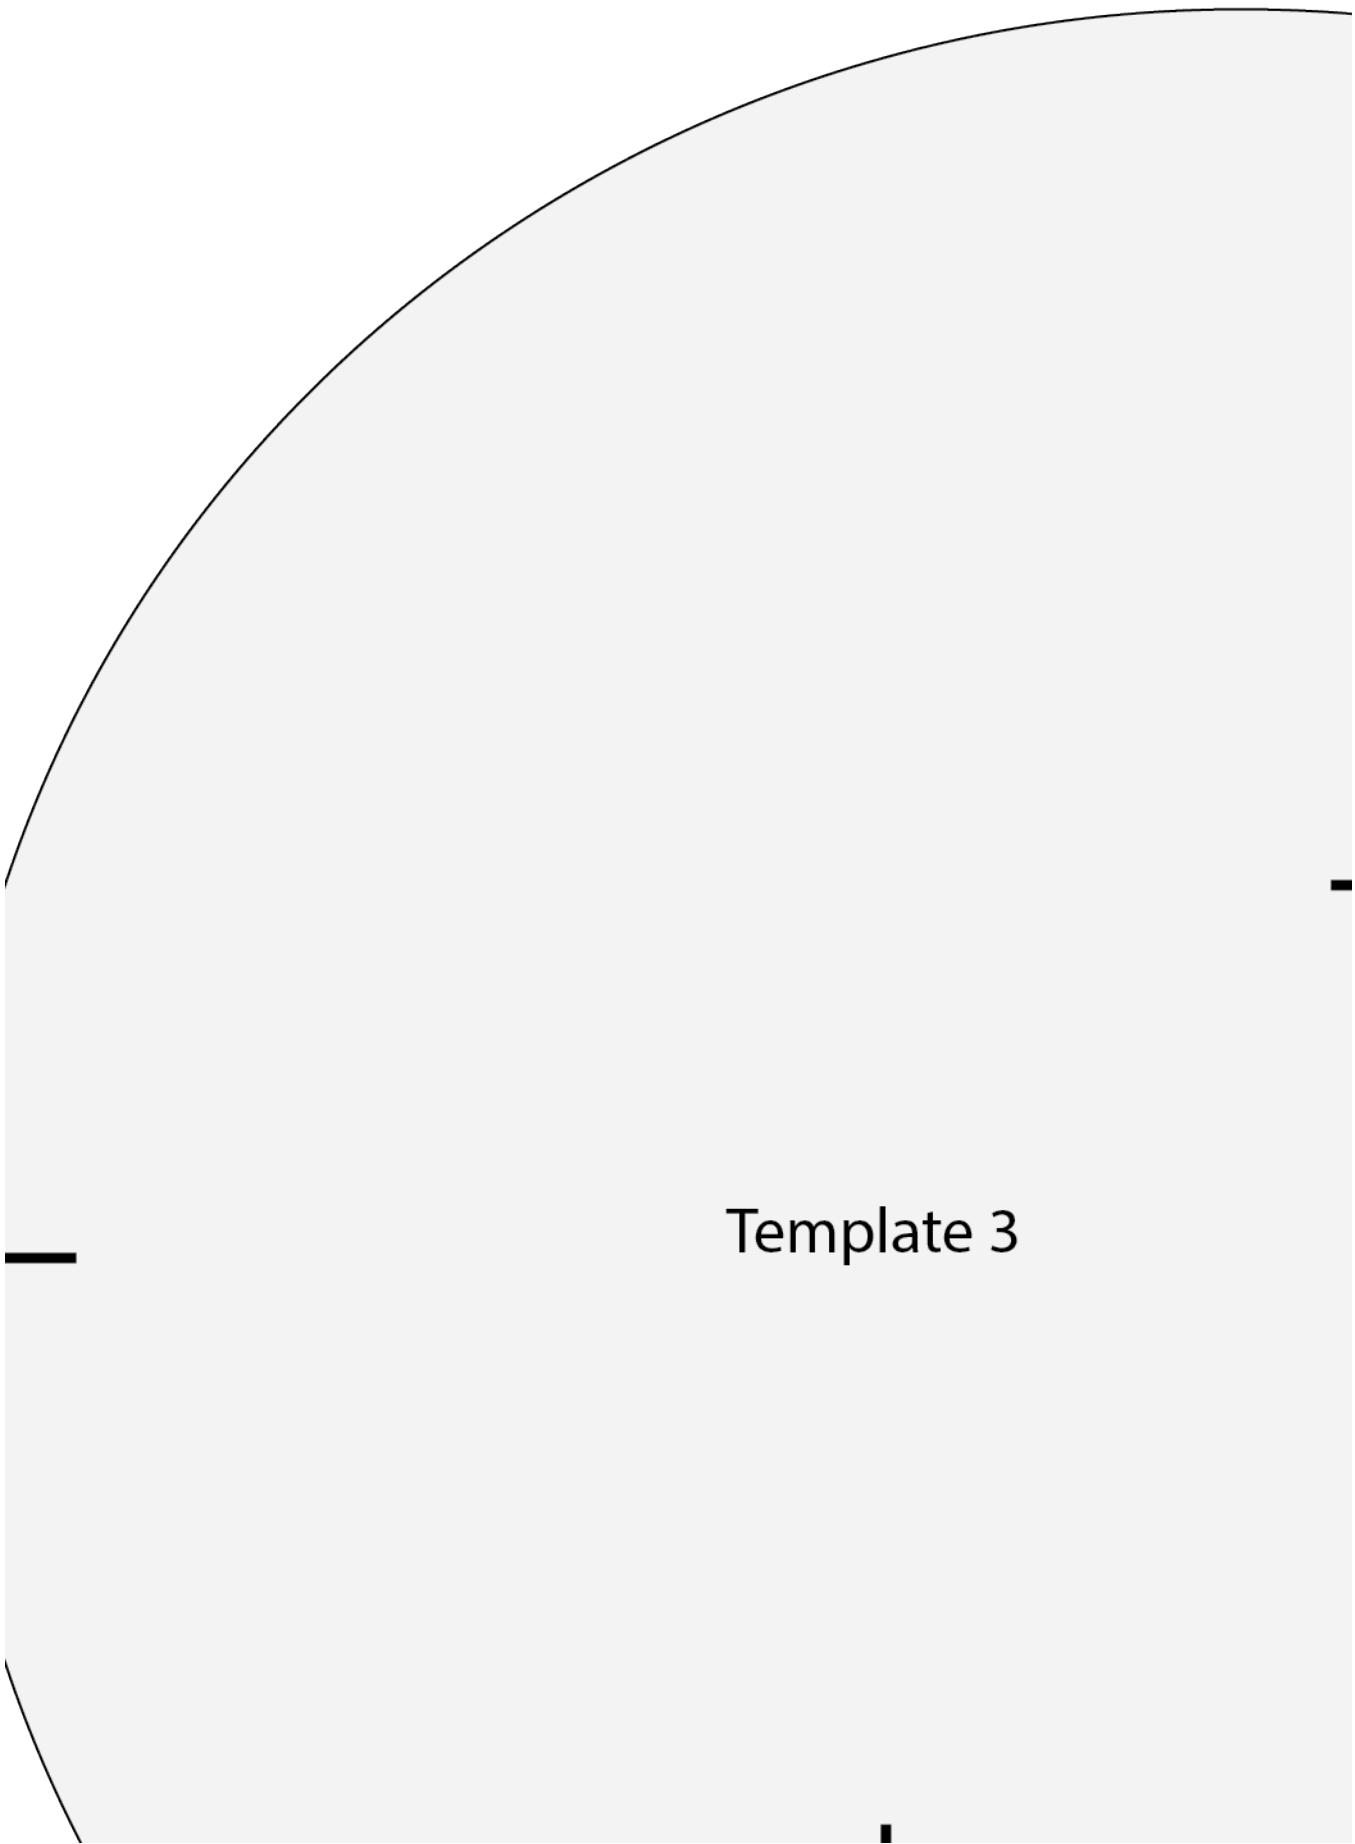

Template 3



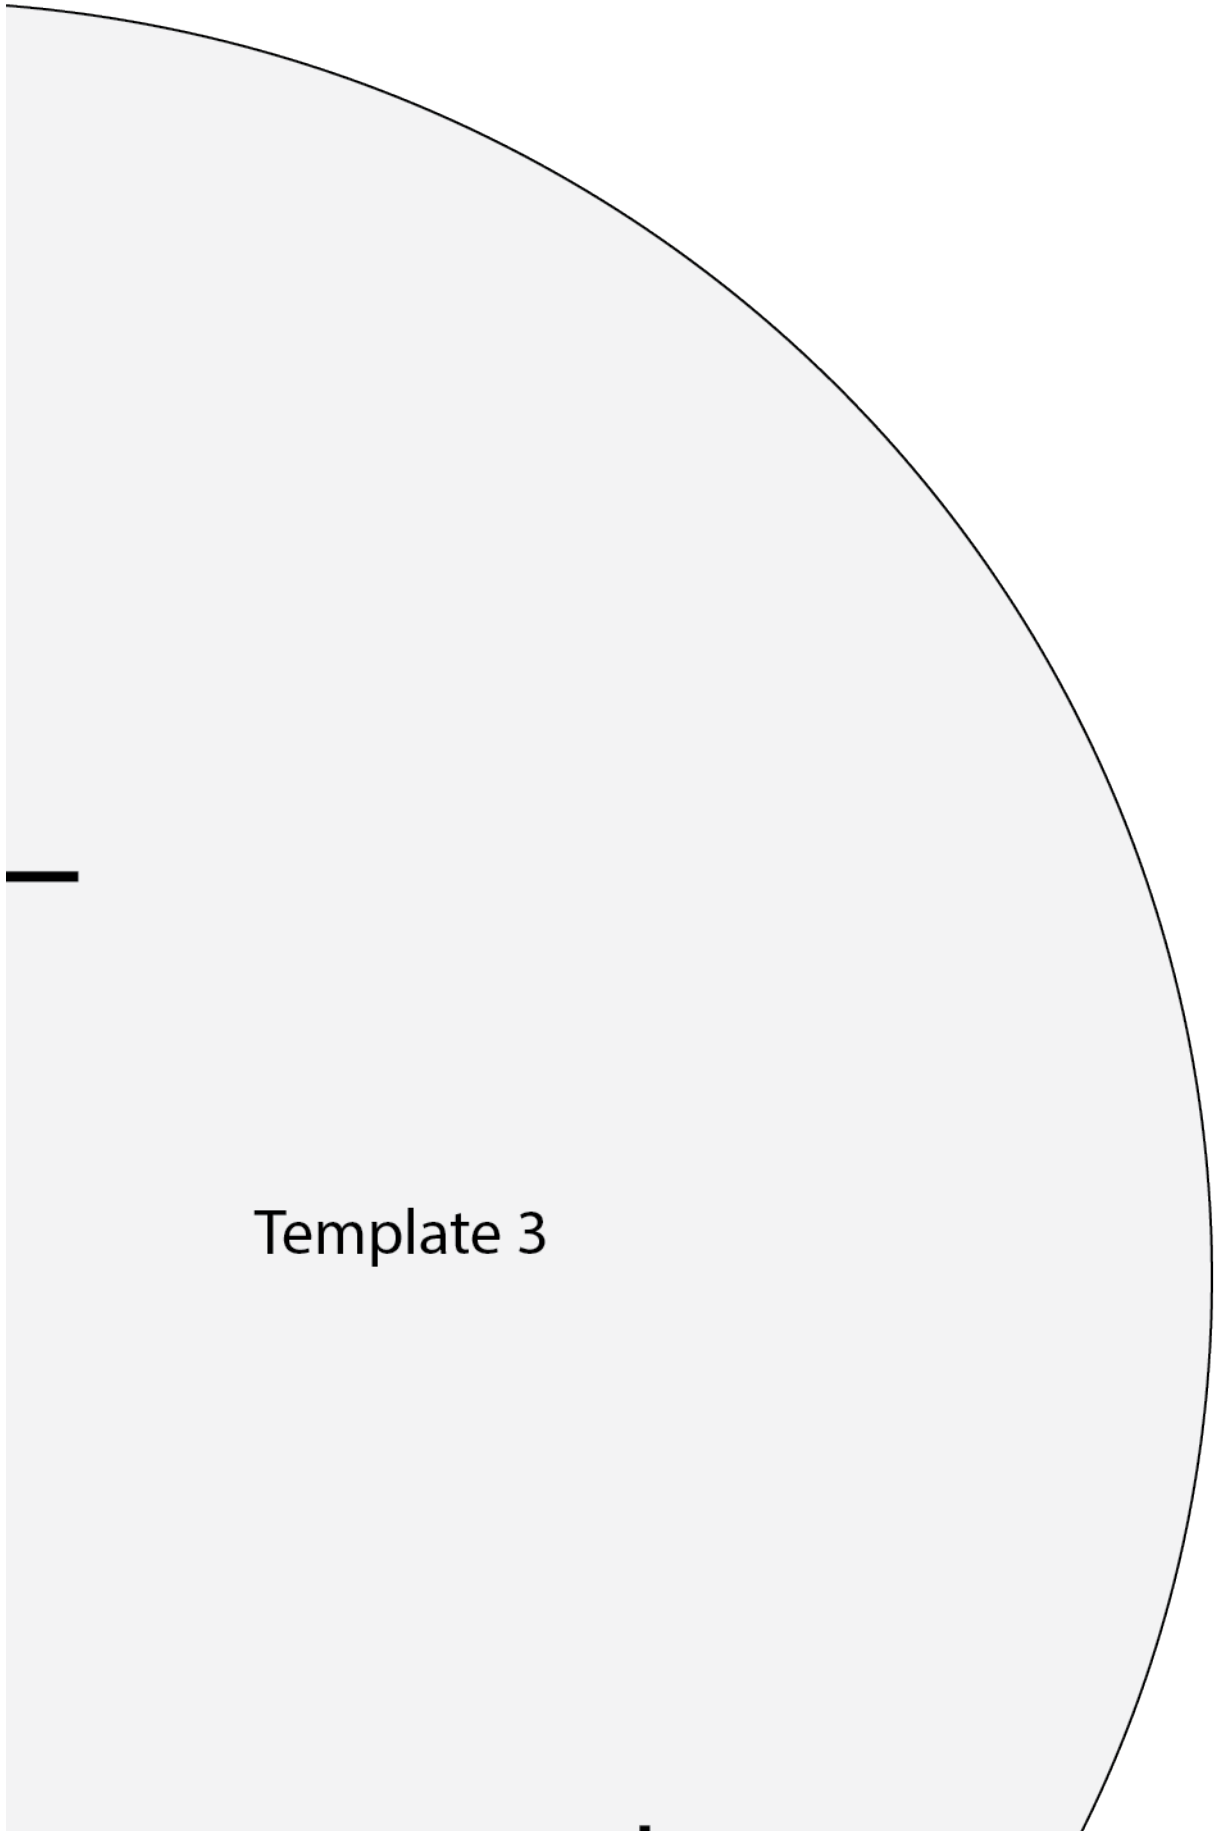

Template 3

